



NEW RAGE CYCLES

Triumph Street Cup Fender Eliminator Installation Instructions


1. Remove seat from bike
2. Remove four stock bolts holding stock fender:

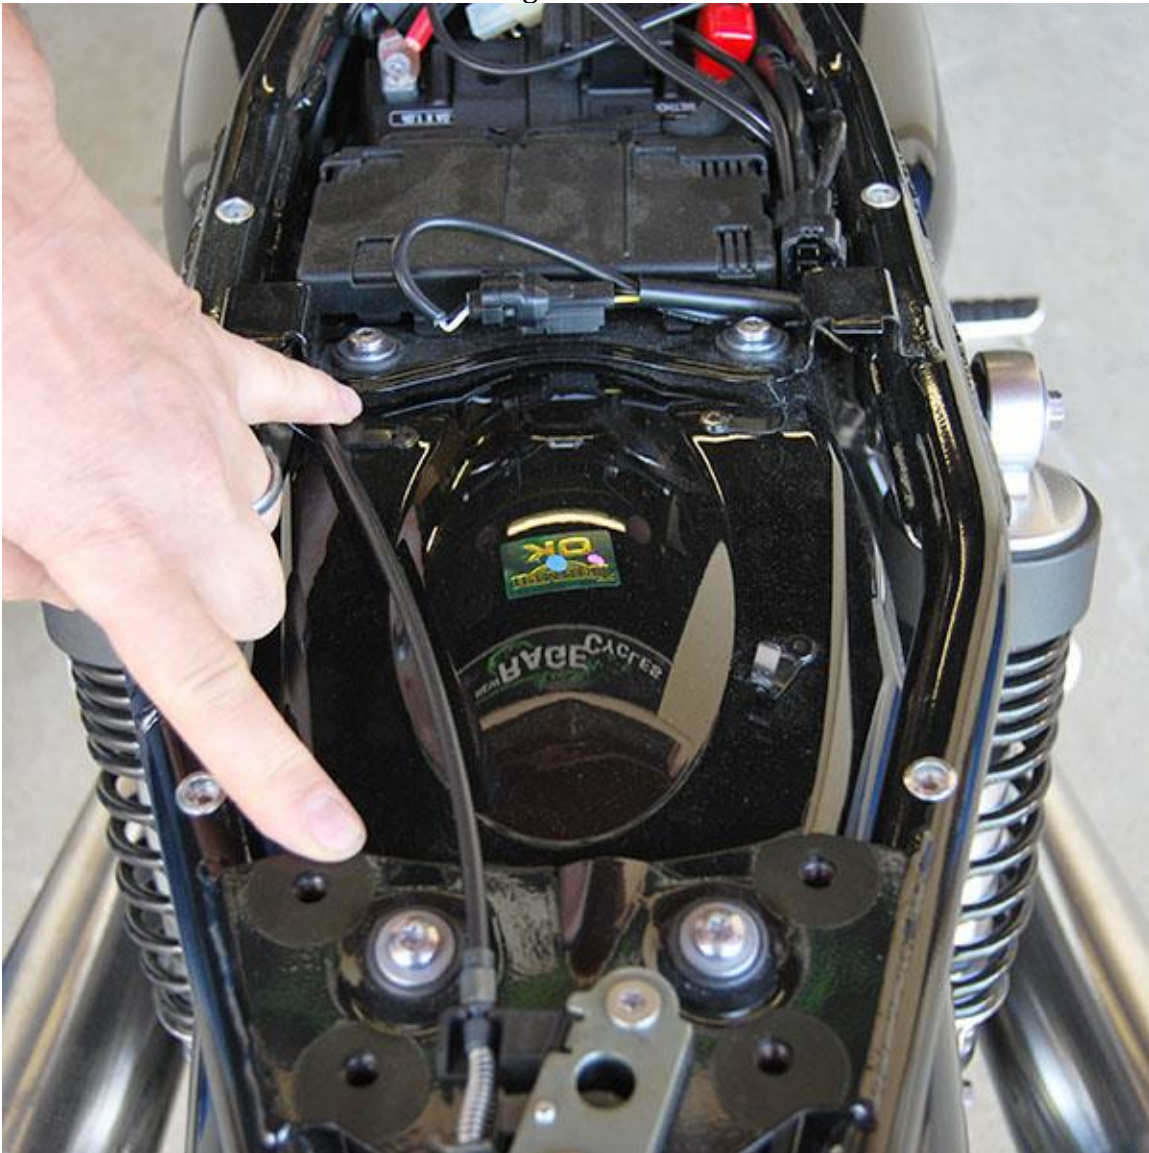


3. Unplug stock connector attached to ECU:

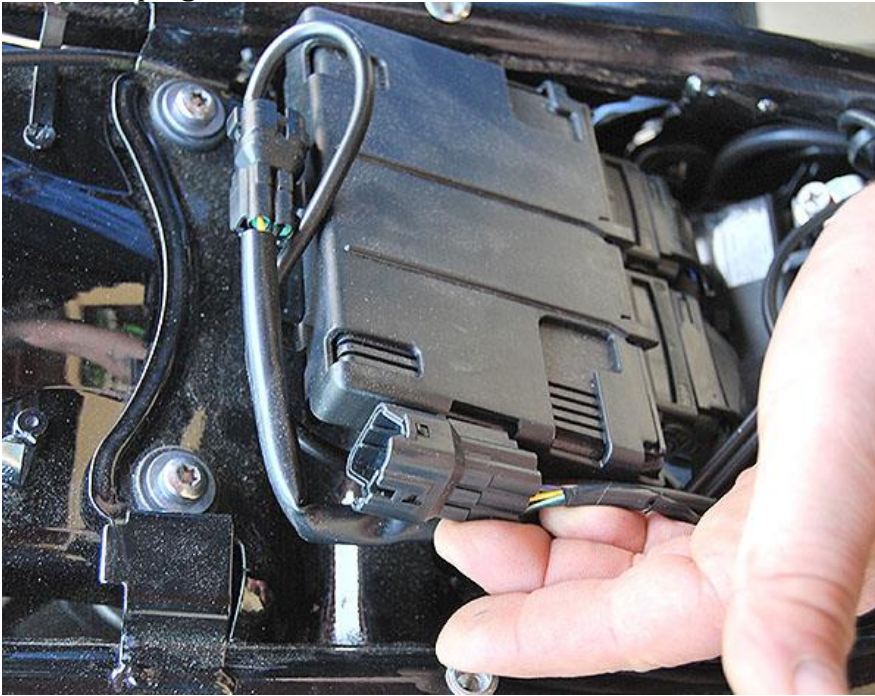


4. Install new belly pan using stock bolts and supplied M6 nuts. Start by using rear holes and leaving them loose:

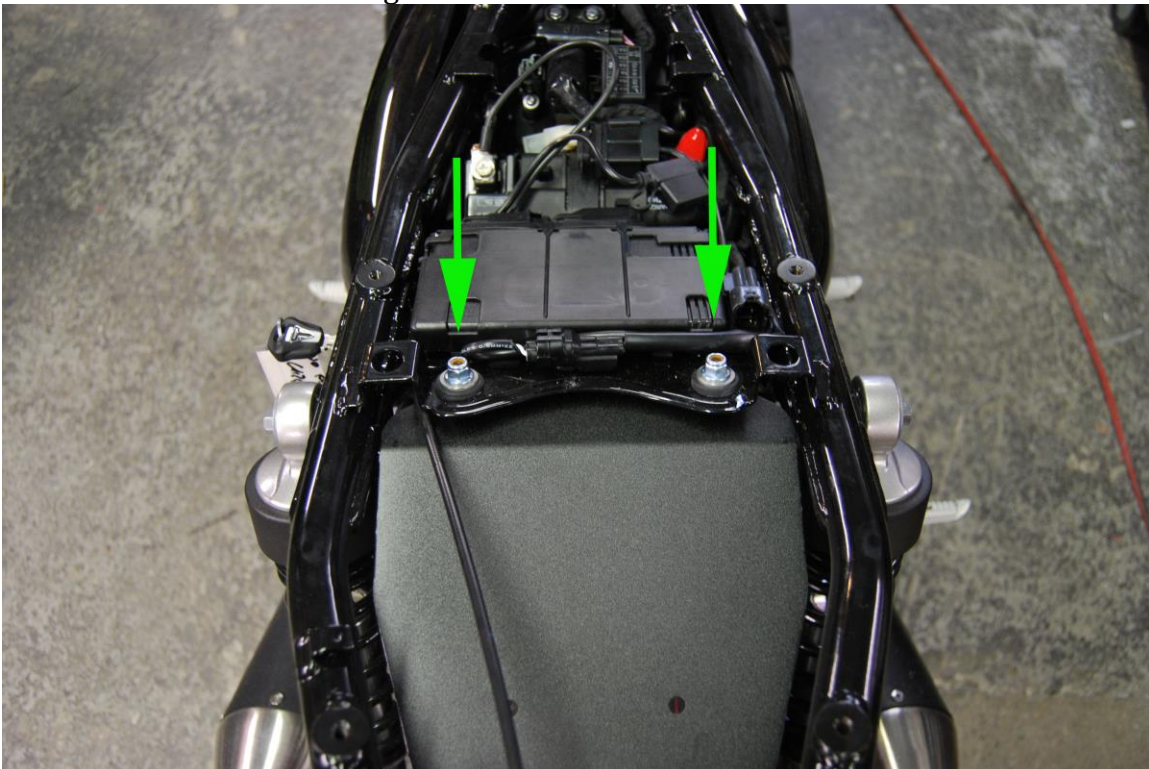


5. Assemble NRC license plate bracket to tail light with M6x10 bolts and star nuts:

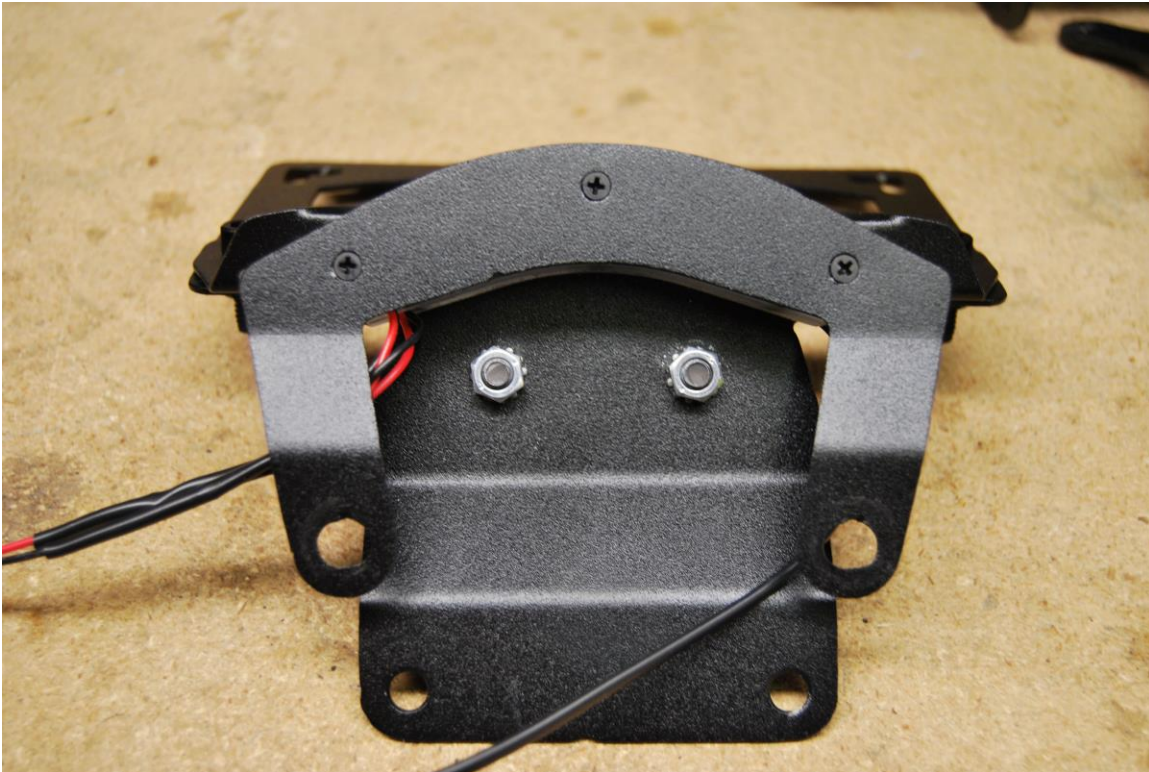

6. Plug red barrel plate light connectors together
7. Slide tail light into position. The bottom bracket should line up with the remaining (2) holes of the belly pan. Use M6 bolts and nuts to secure:

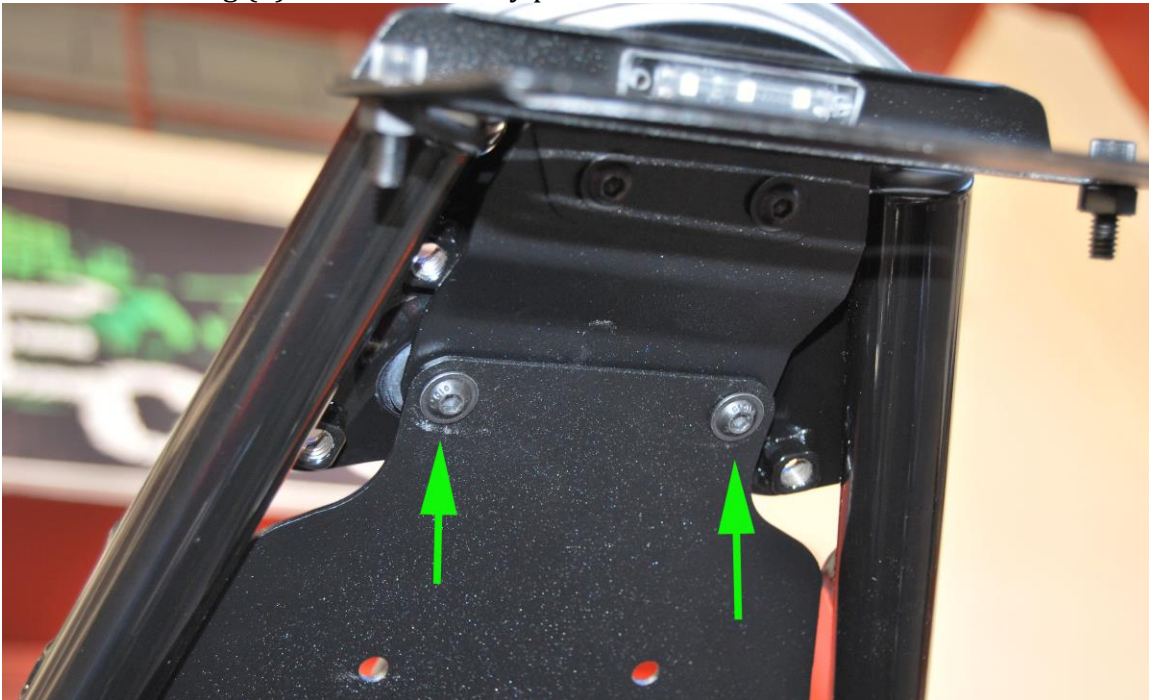

8. The top bracket should line up with (2) holes directly behind it. Prior to tightening anything, slide turn signal brackets into position, sandwiching between tail light bracket:

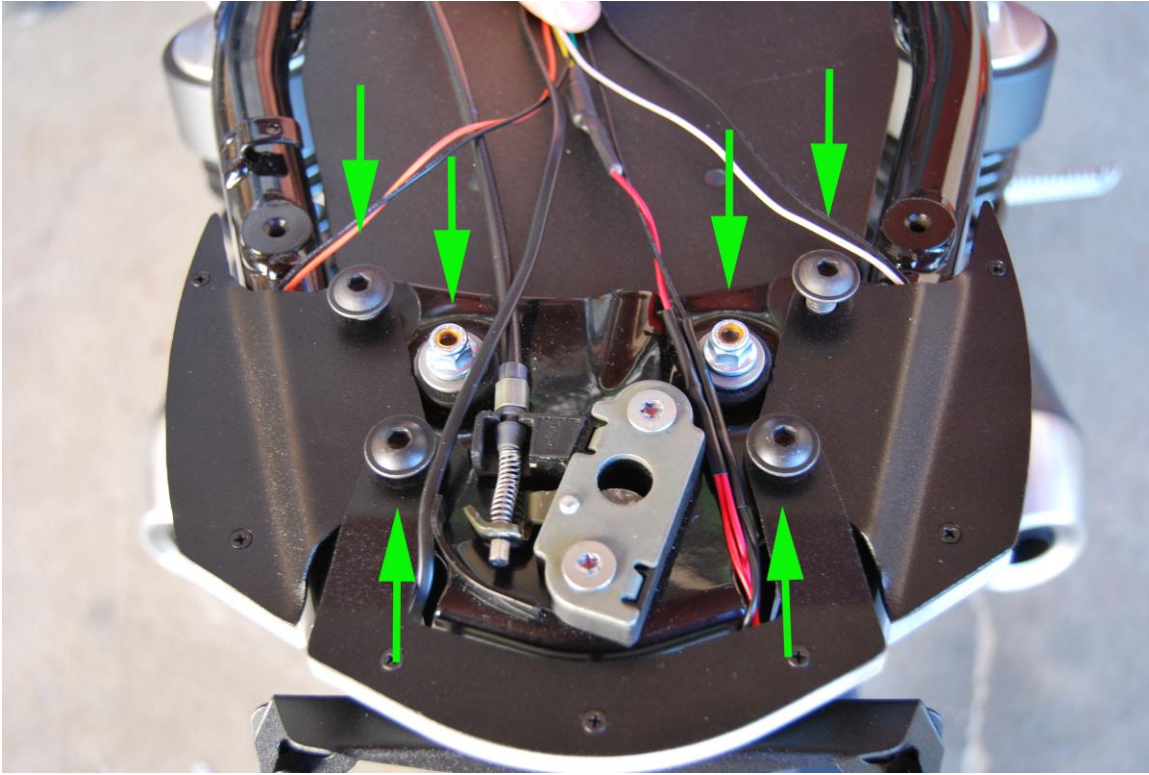

9. Tighten all bolts
10. Plug new tail light back into stock connector
11. Zip tie any excess wires together
12. Put seat back on
13. Go out and ride!