

INSTALLATION INSTRUCTIONS

REAR AXLE COVERS FOR SOFTAIL, CHROME

7486

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|-------------------|---|-----------------------------------------|
| 2 | Rear Axle Covers | 1 | Hardware Kit, containing: |
| 2 | Mounting Brackets | 2 | 1/4-20 x 1/2" Hex Head Cap Screw |
| | | 2 | 1/4" Internal-tooth Lock Washer |
| | | 4 | #10-24 X 5/8 Flat Socket Cap Screw |
| | | 1 | Install Bracket |
| | | 1 | 1.00 ID X 1.63 OD X 1.5MM Custom Washer |

YOU WILL ALSO NEED:

Hex wrench set, torque wrench, combo wrench set, dead blow hammer or rubber mallet

PICTURES SHOWN ARE OF THE BLACK PARTS. INSTALLATION OF THE CHROME PARTS WILL BE THE SAME.


NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

- STEP 2** Refer to PIC 2. Remove existing E-Clip from left (clutch) side of motorcycle. Set aside, it will be reused. Lightly loosen the rear axle nut. Loosen it until it is almost flush with the end of the rear axle.

- STEP 3** Using a dead blow hammer or rubber mallet lightly hit the end of the left side of the rear axle in, so that it axle protrudes slightly on the right (brake) side.

Note: Be careful not too push the axle too far through. Leaving the axle nut on the left end should help prevent the axle from being pushed too far through.

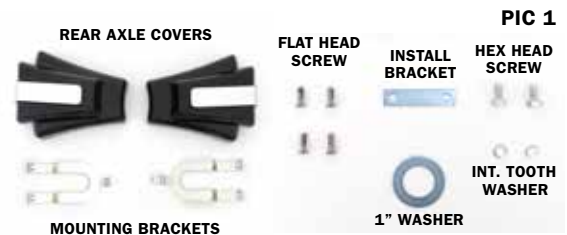

INSTALLATION INSTRUCTIONS

REAR AXLE COVERS FOR SOFTAIL, CHROME

7486

-CONTINUED-

STEP 4 Refer to PIC 3 and 4. Locate one (1) mounting bracket. With the open end of the bracket facing towards the front of the bike, slide the bracket over the rear axle.

STEP 5 Lightly fasten the axle nut to draw the rear axle back towards the left side. The Mounting Bracket on the right side should be lightly held in place due to the axle being pulled back to the left side.

Note: Do not fully tighten the axle nut. Having a little slack will allow you to reposition the bracket if needed.

STEP 6 Refer to PIC 5. On the left (clutch) side, remove existing rear axle nut, and washer. Set the axle nut aside, it will be reused. Discard the washer.

STEP 7 Refer to PIC 6 and 7. Locate one (1) mounting bracket, one (1) Install Bracket, two (2) Flat Socket Cap Screws, and one (1) 1" Custom Washer. Attach the install bracket to the mounting bracket, using the flat head screws. Align and place the mounting bracket over the rear axle. Thread the washer onto the rear axle.


STEP 8 Refer to PIC 8. Reinstall and lightly fasten the axle nut, that was removed in Step 6. Locate one (1) Rear Axle Cover; align and test fit it over the mounting bracket on the right (brake) side and the left (clutch) side. Adjust the position of the mounting brackets as needed before fully tightening the axle nut. Once the axle nut is fully tightened, reinstall the E-clip that was removed in Step 2.

REAR AXLE NUT TORQUE VALUE: 95-105 FT-LBS (128.8-142.5 NM)

Note: You may have to loosen the exhaust system near the rear axle to gain better access for placing the rear axle cover on the right (brake) side.



PIC 3



PIC 4



PIC 5



PIC 6



PIC 7



PIC 8

INSTALLATION INSTRUCTIONS

REAR AXLE COVERS FOR SOFTAIL, CHROME

7486

-CONTINUED-

STEP 9 Refer to PIC 9. Locate one (1) Rear Axle Cover; align and place it over the mounting bracket on the right (brake) side.



STEP 10 Refer to PIC 10 and 11. Locate one (1) Hex Head Screw, and one (1) Internal-tooth Lock Washer. Thread the washer on to the screw. Align the axle cover over the mounting bracket. Insert and lightly fasten the screw and washer assembly on the back rear side of the cover and mounting bracket.



STEP 11 Refer to PIC 12. Locate two (2) Flat Socket Cap Screws. Align the front holes of the axle cover and the mounting bracket. Insert and fully fasten the screw. Fully tighten the backside hex head screw.



STEP 12 On the left (clutch) side, remove the install bracket and flat head screws from the mounting bracket. Set screws aside, they will be reused. Discard the install bracket.

STEP 13 Refer to PIC 13 through 15. Locate one (1) Hex Head Screw, and one (1) Internal-tooth Lock Washer. Thread the washer on to the screw. Align the axle cover over the mounting bracket. Insert and lightly fasten the screw and washer assembly on the back rear side of the cover and mounting bracket.



STEP 14 Refer to PIC 16 and 17. Locate two (2) Flat Socket Cap Screw. Align the front holes of the axle cover and the mounting bracket. Insert and fully fasten the screws. Fully tighten the backside hex head screw.



INSTALLATION INSTRUCTIONS

REAR AXLE COVERS FOR SOFTAIL, CHROME

7486

-CONTINUED-

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.



LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts (s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice