



S&S Teardrop Installation Instructions for Fuel Injected Harley-Davidson[®] Big Twin and Sportster[®] Models (Not For Models With Electronic Throttle Control)

DISCLAIMER:

These S&S parts are designed for high performance applications and are intended for the very experienced rider only. The installation of these S&S parts may void or adversely affect your factory warranty. In addition such installation and use may violate certain federal, state, and local laws, rules and ordinances as well as other laws when used on motor vehicles used on public highways. Always check federal, state, and local laws before modifying your motorcycle. It is the sole and exclusive responsibility of the user to determine the suitability of the product for his or her use, and the user shall assume all legal, personal injury risk and liability and all other obligations, duties, and risks associated therewith.

The words Harley[®], Harley-Davidson[®], H-D[®], Sportster[®], Evolution[®], and all H-D part numbers and model designations are used in reference only. S&S Cycle is not associated with Harley-Davidson, Inc.

SAFE INSTALLATION AND OPERATION RULES:

Before installing your new S&S part it is your responsibility to read and follow the installation and maintenance procedures in these instructions and follow the basic rules below for your personal safety.

- Gasoline is extremely flammable and explosive under certain conditions and toxic when breathed. Do not smoke. Perform installation in a well ventilated area away from open flames or sparks.
- If motorcycle has been running, wait until engine and exhaust pipes have cooled down to avoid getting burned before performing any installation steps.
- Before performing any installation steps disconnect battery to eliminate potential sparks and inadvertent engagement of starter while working on electrical components.
- Read instructions thoroughly and carefully so all procedures are completely understood before performing any installation steps. Contact S&S with any questions you may have if any steps are unclear or any abnormalities occur during installation or operation of motorcycle with a S&S part on it.
- Consult an appropriate service manual for your motorcycle for correct disassembly and reassembly procedures for any parts that need to be removed to facilitate installation.
- Use good judgment when performing installation and operating motorcycle. Good judgment begins with a clear head. Don't let alcohol, drugs or fatigue impair your judgment. Start installation when you are fresh.
- Be sure all federal, state and local laws are obeyed with the installation.
- For optimum performance and safety and to minimize potential damage to carb or other components, use all mounting hardware that is provided and follow all installation instructions.
- Motorcycle exhaust fumes are toxic and poisonous and must not be breathed. Run motorcycle in a well ventilated area where fumes can dissipate.

IMPORTANT NOTICE:

Statements in this instruction sheet preceded by the following words are of special significance.



WARNING

Means there is the possibility of injury to yourself or others.



CAUTION

Means there is the possibility of damage to the part or motorcycle.

NOTE

Other information of particular importance has been placed in italic type.

S&S recommends you take special notice of these items.

WARRANTY:

All S&S parts are guaranteed to the original purchaser to be free of manufacturing defects in materials and workmanship for a period of twelve (12) months from the date of purchase. Merchandise that fails to conform to these conditions will be repaired or replaced at S&S's option if the parts are returned to us by the purchaser within the 12 month warranty period or within 10 days thereafter.

In the event warranty service is required, the original purchaser must call or write S&S immediately with the problem. Some problems can be rectified by a telephone call and need no further course of action.


A part that is suspect of being defective must not be replaced by a Dealer without prior authorization from S&S. If it is deemed necessary for S&S to make an evaluation to determine whether the part was defective, a return authorization number must be obtained from S&S. The parts must be packaged properly so as to not cause further damage and be returned prepaid to S&S with a copy of the original invoice of purchase and a detailed letter outlining the nature of the problem, how the part was used and the circumstances at the time of failure. If after an evaluation has been made by S&S and the part was found to be defective, repair, replacement or refund will be granted.

ADDITIONAL WARRANTY PROVISIONS:

- (1) S&S shall have no obligation in the event an S&S part is modified by any other person or organization.
- (2) S&S shall have no obligation if an S&S part becomes defective in whole or in part as a result of improper installation, improper maintenance, improper use, abnormal operation, or any other misuse or mistreatment of the S&S part.
- (3) S&S shall not be liable for any consequential or incidental damages resulting from the failure of an S&S part, the breach of any warranties, the failure to deliver, delay in delivery, delivery in non-conforming condition, or for any other breach of contract or duty between S&S and a customer.
- (4) S&S parts are designed exclusively for use in Harley-Davidson[®] and other American v-twin motorcycles. S&S shall have no warranty or liability obligation if an S&S part is used in any other application.

INSTALLATION FOR BIG TWIN

1. Remove stock air cleaner cover and backplate assembly, retain stock gasket between backplate and throttle body/carburetor.
2. Select the breather fittings with the correct threads for your engine. 1991-'16 Sportster® and 1993-'99 big twin models use 1/2-13 thread. 1999-'16 big twin models use 3/8-16 thread. Assemble head breather assembly with parts in order as shown in **Picture 1** from left to right. Install in cylinder head as shown in **Picture 2**, and tighten to 16 ft/lb.

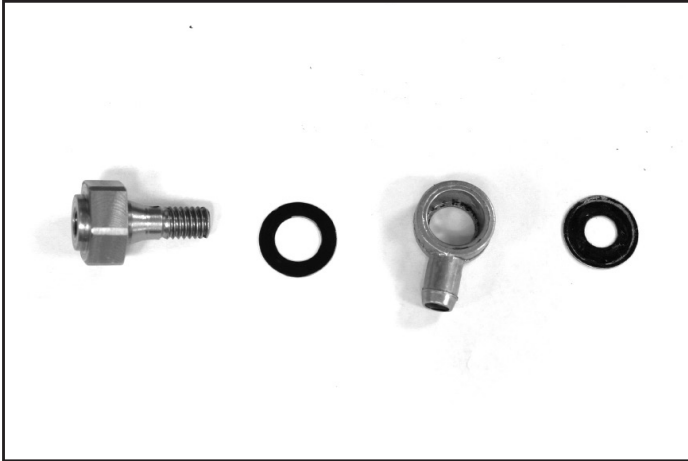

Picture 1



Picture 3



Picture 4



Picture 2



Picture 5

3. Install adapter plate on throttle body/carburetor. Place stock gasket on first followed by adapter plate as shown in **Picture 3** and three slotted screws. The orientation of the bracket should be with the counter bore facing outward and hose fittings at the four and eight o'clock positions, **See Picture 4**. Apply blue threadlock to screws and tighten to 6 ft-lbs.
4. Install breather hoses. Use spring clip to secure hose to head breather fitting and plastic tie strap on adapter plate fitting. **See Pictures 5 and 6**.



Picture 6


5. Place gasket on S&S® backplate as shown in **Picture 7**. Apply blue thread locker to three slotted screws install on motorcycle. Insert outer breather screws through ears of backplate and torque to 16 ft-lbs. **See Picture 8.**
6. Install air filter on the backplate. Place teardrop cover over filter. Apply blue threadlock to the three Phillips head screws, and fasten cover to backplate. **See Pictures 9 and 10.**
7. Apply the CARB EO label to the frame down tube above or below the factory label. Do not cover up any portion of the factory label. **See Picture 11.**



Picture 10



Picture 7

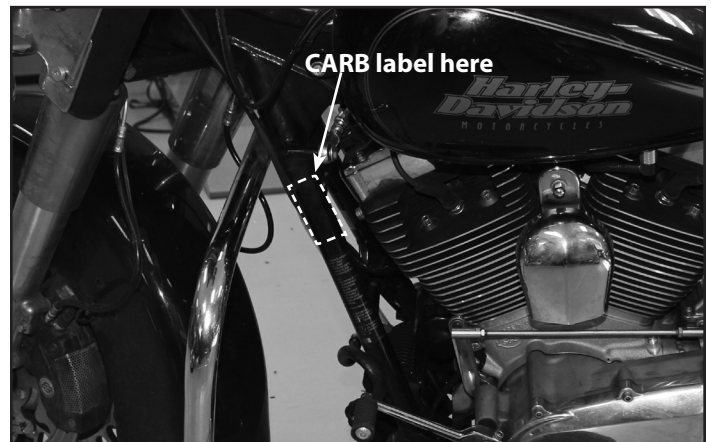

Picture 11



Picture 8

INSTALLATION FOR HARLEY-DAVIDSON® SPORTSTER® MODELS


1. Follow steps 1-4 for big twin installation.
2. Install backplate support bracket (S shaped bracket) on front and rear breather bolts in a vertical position using head breather screws. These brackets are installed with the bend facing out.



Picture 12




Picture 9

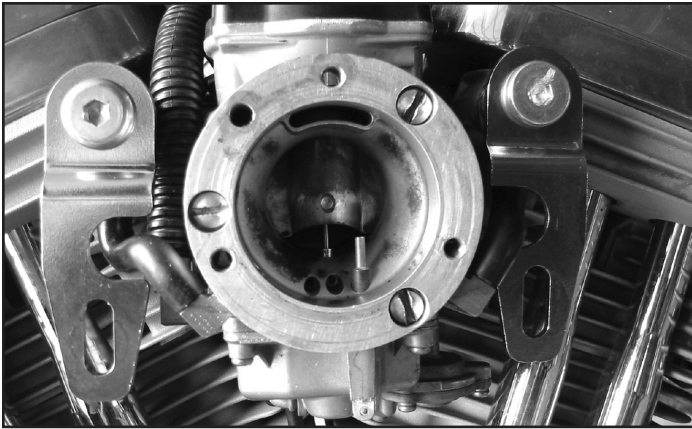

Picture 13

Tighten to 16 ft-lbs. **See Pictures 12 and 13**


3. Place gasket on S&S® backplate as shown in **Picture 14**, and install on motorcycle with three slotted screws. Be sure to use blue

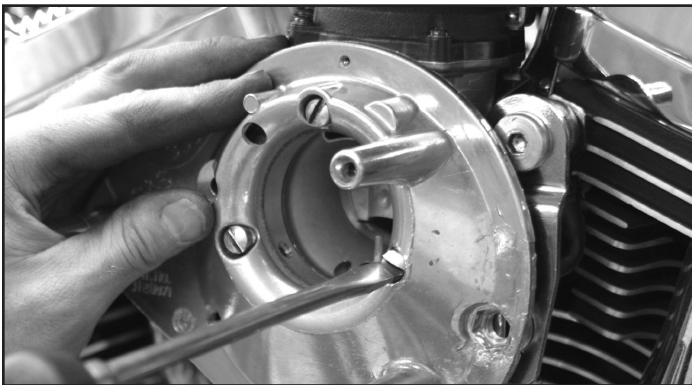


Picture 14

threadlock.

4. Be sure intake assembly is level and install mounting hardware from backplate to support brackets. The front bracket will use a $\frac{5}{16}$ "-18 x 1" bolt, $\frac{5}{16}$ " spacers then a flat washer and locknut. The rear bracket uses a $\frac{5}{16}$ "-18 x 1" flat head socket head cap screw, the $\frac{1}{2}$ " ID x .250" thick x 1" OD washer, then the $\frac{5}{16}$ " flat washer and $\frac{5}{16}$ "-18 locknut. **See Pictures 15 and 16.**
5. Install air filter on the backplate. Place teardrop cover over filter. Apply blue threadlock to the three Phillips head screws, and fasten cover to backplate. **See Pictures 17 and 18.**
6. Apply the CARB EO label to the frame down tube above or below the factory label. Do not cover up any portion of the factory label. **See Picture 11** on page 3.

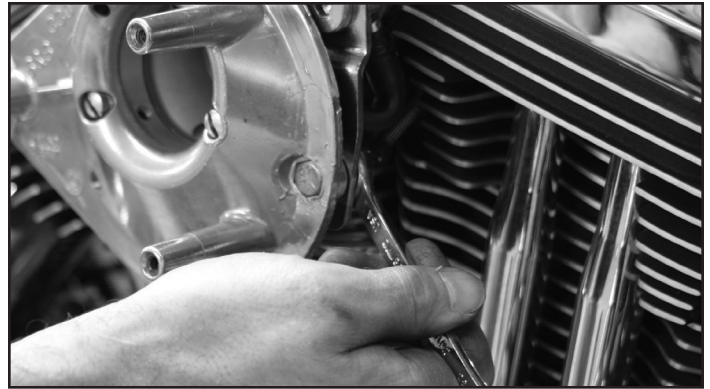

Picture 15

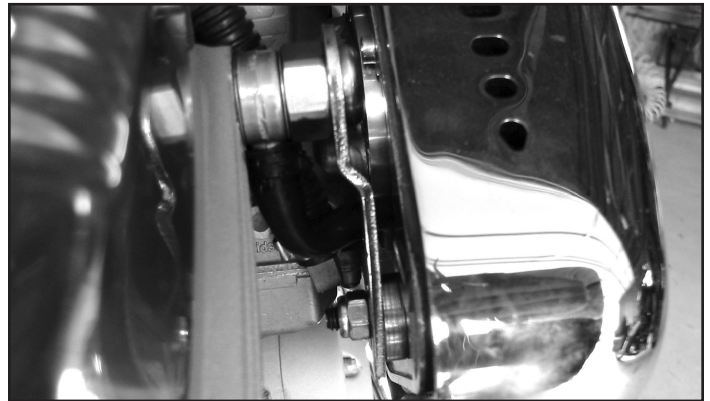

Picture 16



Picture 17




Picture 18

Replacement Parts For S&S Teardrop Air Cleaners (See line drawing on next page)

1. Air cleaner cover		
Chrome	17-0378	
Wrinkle Black	17-0384	
Gloss Black	170-0384A	
Slasher	17-0004	
2. Cover screw,		
Chrome (H-D® #1305)		
(each).....	50-0072	
3 pack.....	50-1052	
10 pack.....	50-0094	
Black (H-D® #902)		
(each).....	50-0310-S	
3 pack.....	50-0310	
3. Filter Element, Pleated	106-4722	
4. Backplate,		
1993-'06 bt, stock CV/Delphi® EFI	106-0907	
1991-2007 XL.....	106-0950	
5. Backplate screw, BT 1999-up, All 2002-up EFI BT,Zinc Plated		
(each).....	106-2084	
10 pack	106-2105	
6. Support bracket screw, 5/16" - 18 x 1 1/4"	50-0110	
7. Bracket, support, air cleaner to head, xl, 1991-up		
Front	17-0305	
Rear	106-1285	
8. Washer, flat 5/16" x 11/16" x 1/8"	50-7033	
9. Nut, lock, HH, 5/16"-18.....	50-5021	
10. Backplate plug 1/8"-27 (H-D® #45830-48)		
(each).....	50-8331	
10 pack	50-1015	
11. Shims		
5/8" x .025"		
(each).....	50-7113	
10 pack.....	50-7110	
5/8" x .050"		
(each).....	50-7114	
10 pack.....	50-7111	
5/8" x .075"		
(each).....	50-7115	
10 pack.....	50-7112	
12. Shim kit, XL 1966-'87	17-0314	
(Includes 2 each 5/16" x .018", 5/16" x .030", 5/16" x .048", 5/16" x .105" and 4 each 5/16" x .125")		
Replacement shims		
5/16" x .018"		
(each).....	50-7038	
10 pack.....	50-7107	
5/16" x .030"		
(each).....	50-7039	
10 pack.....	50-7070	
5/16" x .048"		
(each).....	50-7040	
10 pack.....	50-7068	
5/16" x .105"		
(each).....	50-7041	
5 pack.....	50-7062	
5/16" x .125"		
(each).....	50-7042	
2 pack.....	50-7042P	
5 pack.....	50-7066	
13. Breather screw seal		
BT – Washer, .380"		
(each).....	50-7054	
10 pack.....	50-7059	
XL – Washer, .520"		
(each).....	50-7055	
10 pack.....	50-7057	
14. Breather fitting		
(each).....	17-0350	
2 pack	17-0355	
15. Screw, Backplate, Socket Panhead, Alloy Steel	17-0346	
16. Hose, vent, breather, formed,		
BT (each).....	17-0364A	
XL (each).....	106-0161A	
Screw, Breather vent		
BT (each).....	17-0348	
XL (each).....	106-0845	
17. Screw, Backplate Socket Panhead		
5/16-24 x .360", Zinc, Alloy Steel	17-0346	
18. Gasket, backplate		
(each).....	106-1724	
10 pack	106-2328	
19. Adaptor assembly,		
1993-'06 bt	106-0881	
1991-up XL.....	106-1982	
20. Clamp, spring, 9/16"	50-8001	
21. Wire tie (N/S)	50-8003	
(N/S) = Not Shown		

EFI Big Twin (except throttle by wire)

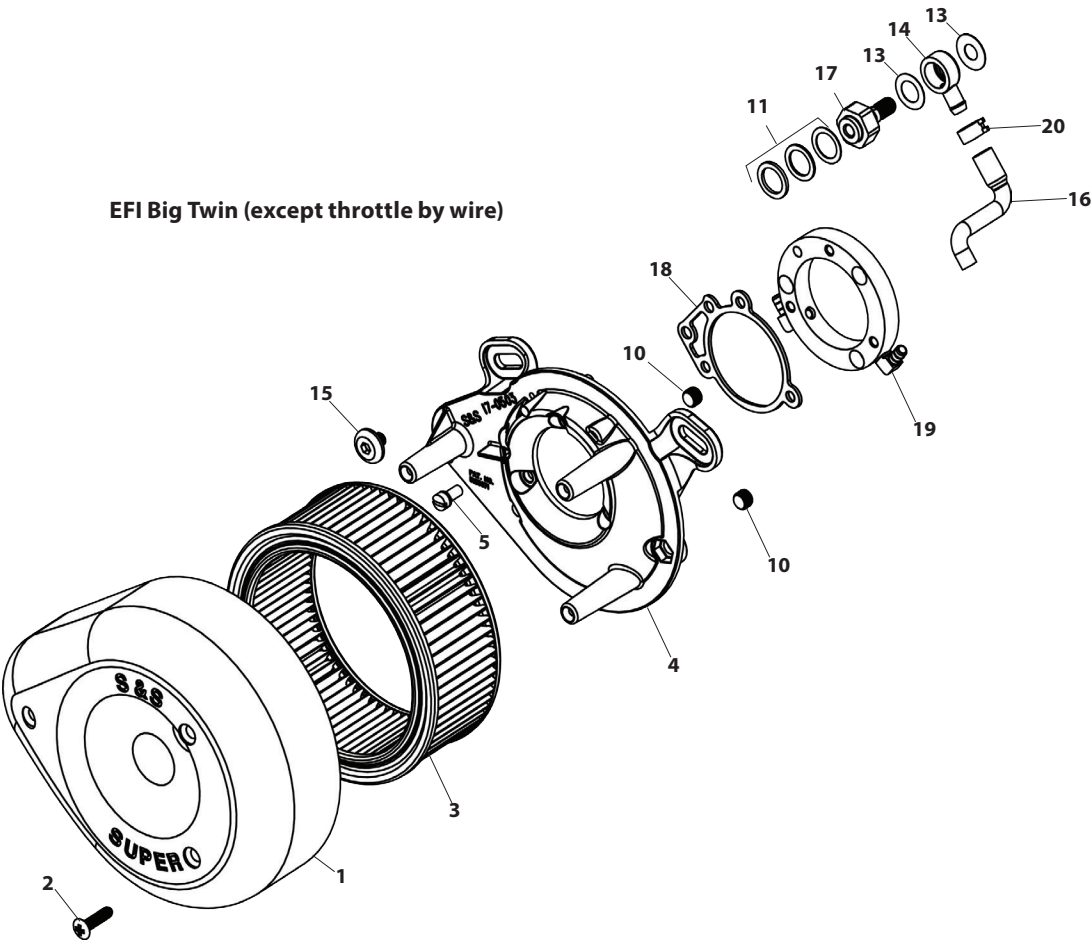

Sportster® Models

