

KAWASAKI MULE 4000 SERIES

Winch Mount

PART # 100845


Hardware Kit: HK-072, HK-031

Kit Components:


Qty.	Part Description
1.....	Mount Plate
1.....	Support Plate
1.....	Standard Fairlead Bracket
4.....	3/8"-16 x 1" Bolt
4.....	3/8" SAE Flat Washer
4.....	3/8"-16 Nut
4.....	3/8" Split Lock Washer
2.....	M8-1.25 x 35mm Bolt
2.....	M8 Flat Washer
2.....	M8 Split Lock Washer
1.....	Hardware Kit (Mini-Rocker Switch)

INSTALLATION INSTRUCTIONS:


1. Start by detaching the front bumper plastic, to do so remove bolts (A) as shown in Figure 2.
2. Install support and mount plate using the 3/8" hardware provided with your mount as shown in Figure 3.
3. Install the winch to the mount plate using the longer M8 bolts (B) provided with the mount for the rear winch holes. (See Figure 4)
For the wide winch use the fairlead bracket supplied with your winch or for the standard winch use the fairlead bracket supplied with the mount.
(See Page 2 for winch and fairlead bracket mounting locations.)
4. Tighten down all bolts.
5. Reinstall front bumper plastic. *(Some wide winches will require trimming of the plastic.)*
6. Use the instructions provided with your winch, wire accordingly.

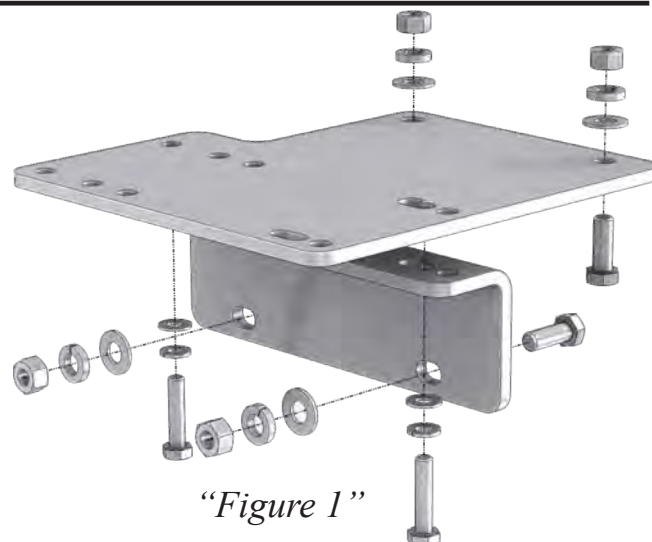


"Figure 1"

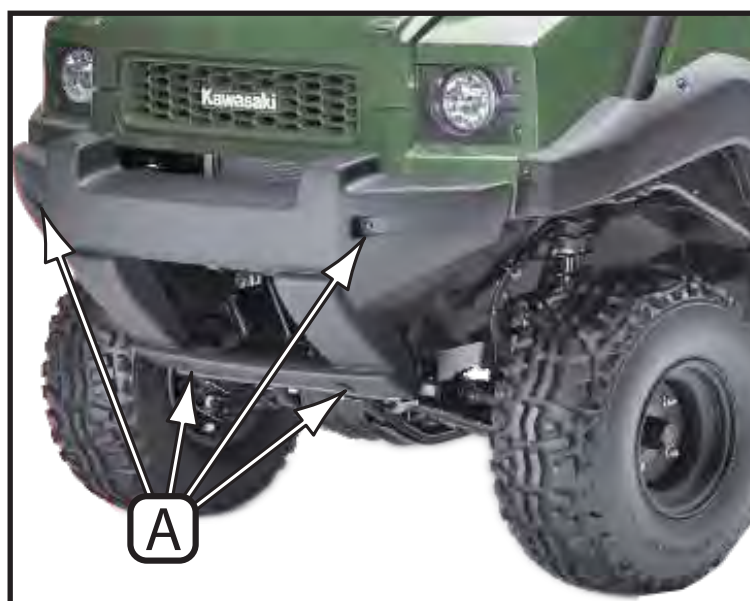

"Figure 2" Bumper Plastic Removal

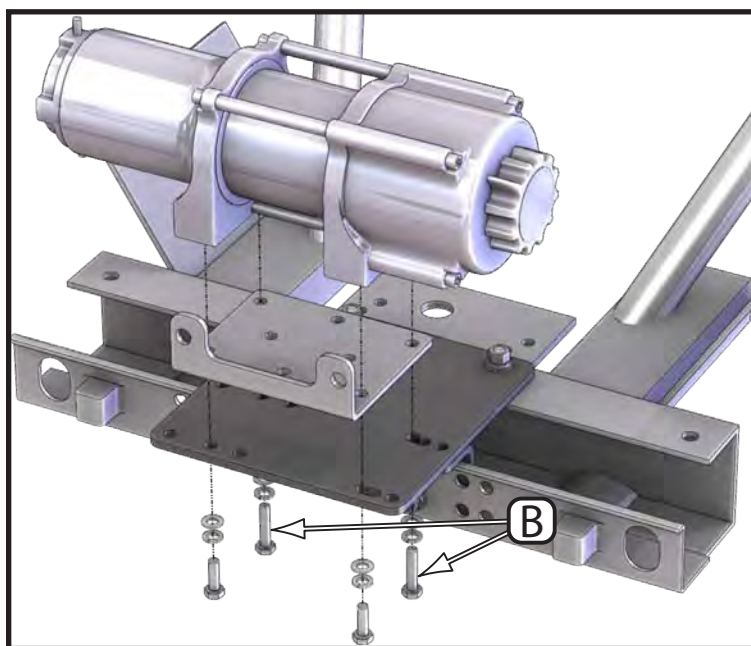


*"Figure 4 " Winch Install
(Standard Winch and Fairlead Shown)*

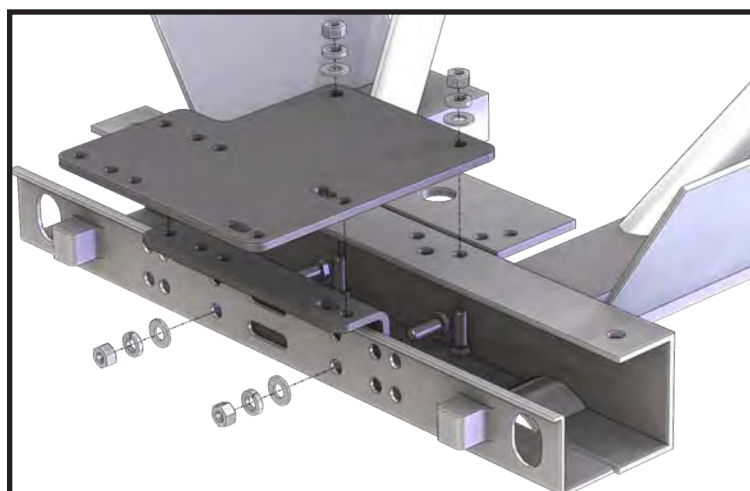


"Figure 3" Mount Install

Standard 4 Hole Centred

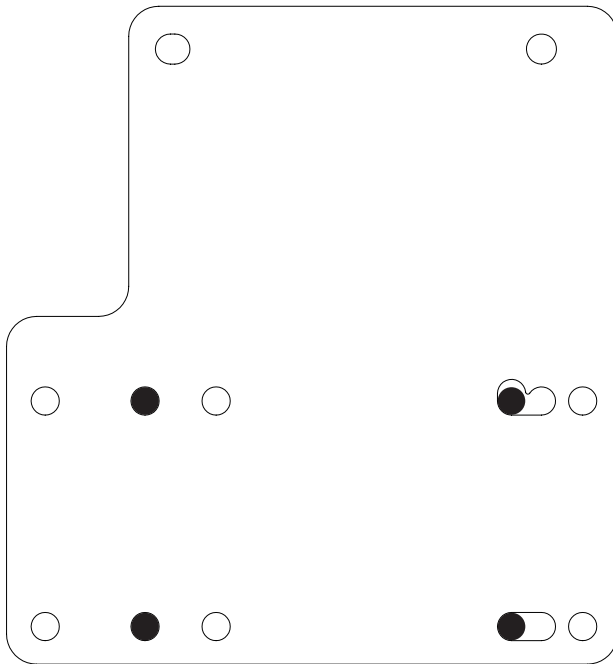


KFI: ST15, A2500, A3000, A4500
WARN: 3.0, RT/XT 25, RT/XT 30
SUPERWINCH: TERRA 25/35

Standard 4 Hole Offset

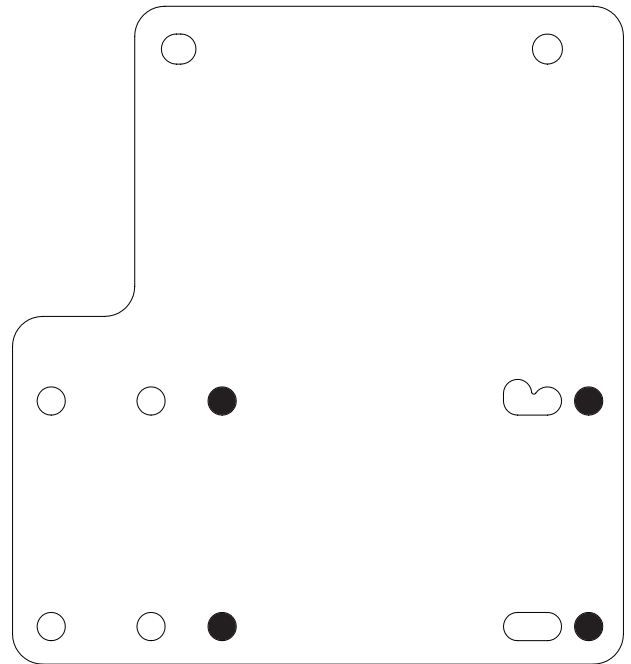


RAMSEY: ATV 2500/3000
MILE MARKER: PE 2.5/3.5, VMX 2.5/3.5
SUPERWINCH: LT3000

Wide 4 Hole

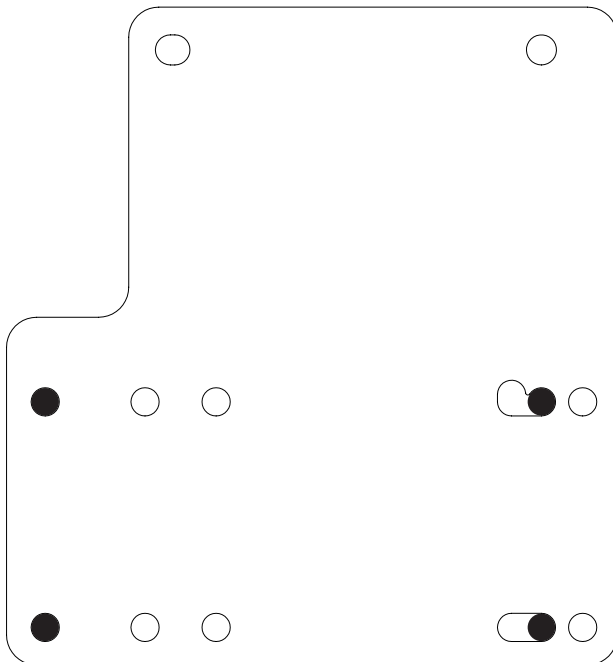

KFI: U4500w
WARN: RT/XT 40
SUPERWINCH: TERRA 45

Standard 2 Hole

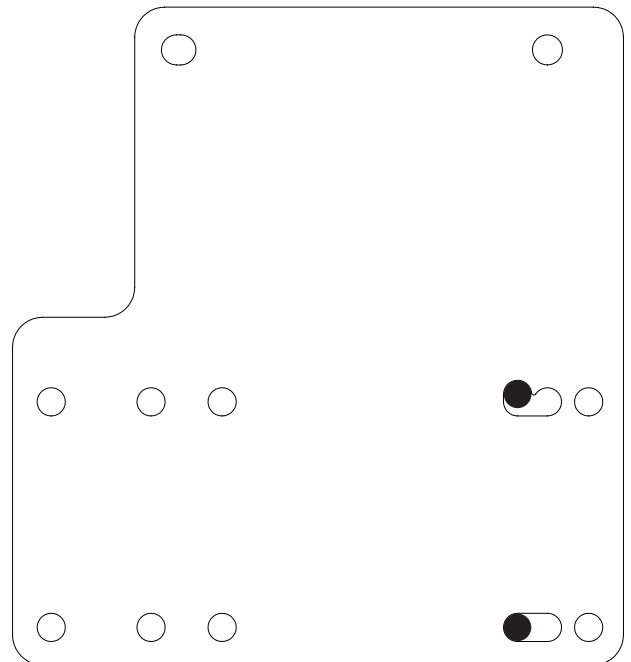


KFI: S2000
SUPERWINCH: LT2000
OTHER 2 HOLE MOUNTED WINCHES




WIRING INFORMATION

1. For contactor location please see “Figure 8”. Mount contactor anywhere inside the hood compartment close to the holes for ease of wiring.
2. Mini-Rocker Switch Hardware kit. This allows you to mount your usual handle bar mounted switch to almost any desired location.
 - a. Remove handlebar mount hardware from the switch.
 - b. Locate desired mounting location
 - c. Mark and drill two switch holes through dash using switch housing as a template
 - d. Drill a 3rd hole for the switch wiring.
 - e. Assemble per Figure 10.
3. Find a location that suits your purposes for the mini-rocker switch and hand remote.
4. The wires will need to be switched for this machine. The longer wires (Blue/Yellow) will be used to go from the battery to the contactor. The shorter wires (Black/Red) will be used to go from the winch to the contactor.

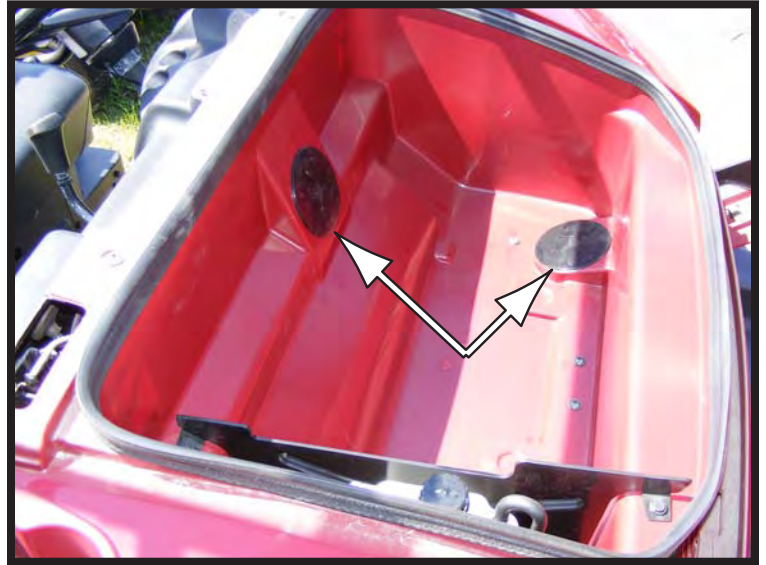

“Figure 8” Contactor Location

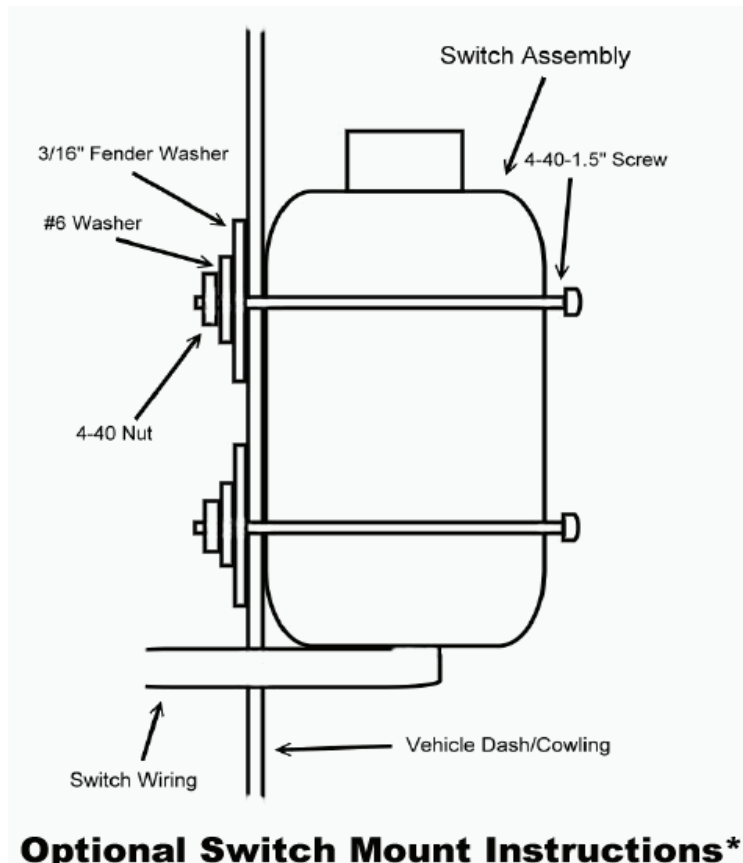

Optional Switch Mount Instructions*

“Figure 10” Mini-Rocker Mounting



*“Figure 9” Battery Location
(Battery is located under driver side of the seat.)*