




Hurricane Crash Bar/Tail Bag Mounting Instructions

SE-4005



Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your vehicle may be different so please use diagrams as a guide. Make sure your vehicle is clean and free from dirt, road grime etc. where the this product mounts. It is the riders responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position, always check for proper mounting position after loading and before each and every ride.

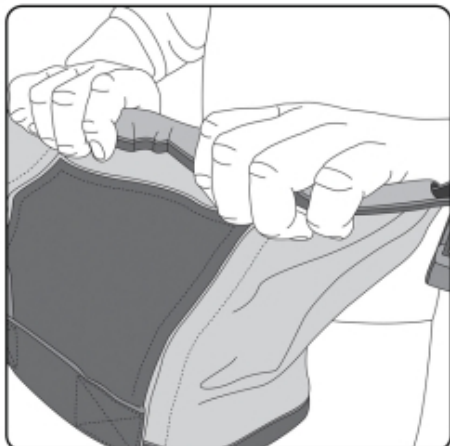


Fill bag and roll down the top a minimum of 3 half turns. Once the top has been rolled down, connect to side quick release buckles.

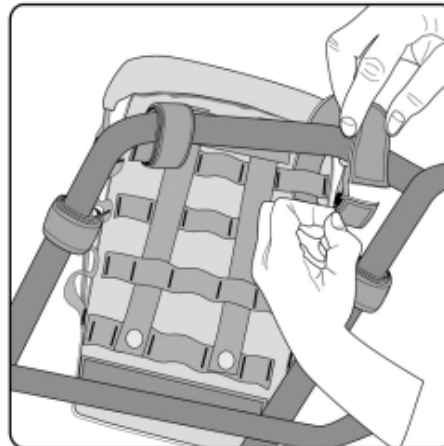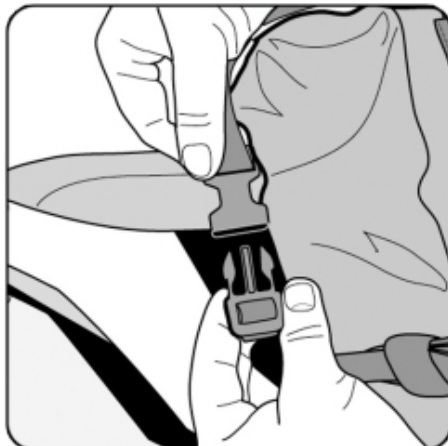

Hold RiggPak up to your mounting location and identify the loops on the back of the bag that line up with the mounting locations. Feed the Hook & Loop straps through the loop on the back of the bag, beginning at the top, wrap the strap around the bar and secure the strap. Repeat on the remaining 4-6 Hook & Loop straps.

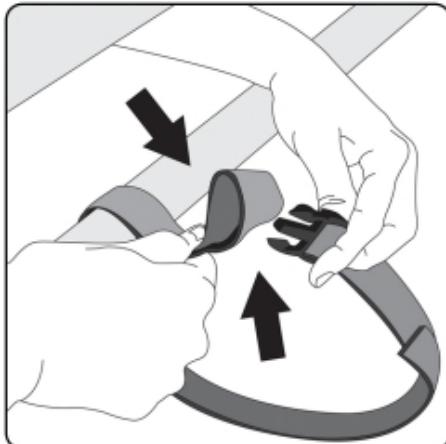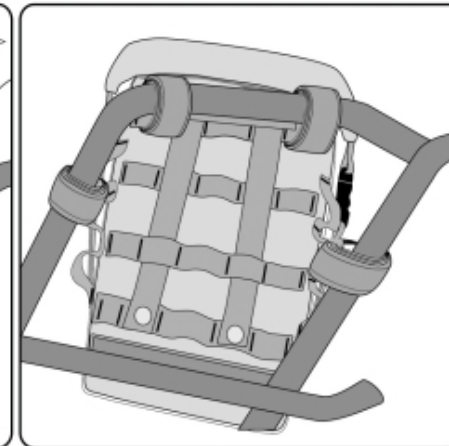

Included with your bag are two quick release compression straps with a loop at each end. Disconnect one set of quick release straps, taking one of the straps with a loop end and pass around the crash bar or secure part of the bike. Pass the buckle on that same strap through the loop creating a girth hitch, as shown. Pull each strap to securely attach. Repeat with the opposing strap on opposite side of bag. Follow same instructions for the second compression strap set. Make sure that the opposing buckles line up.

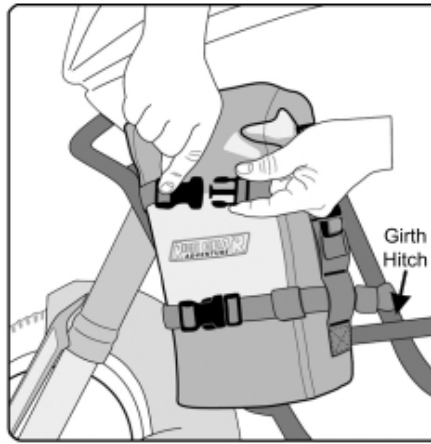

Hold the RiggPak up to the mounting location noting the bar nearest to the anti-migration loops on either side of the bag. Once in place, pass the buckle through anti-migration loops, connect buckles and pulling tight to secure. Roll excess strap into itself and secure behind the elastic loop.



Please scan the above QR code to see how to mount your RiggPak as a tail bag and other ways to carry your gear as well as mounting to another MOLLE accessory.

Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

Always drive safely. Always wear a helmet and protective apparel.

3518-A Lake Center Dr Santa Ana, CA 92704
Tel (714)850-1811 Fax (714)850-1848
e-mail: info@nelsonrigg.com www.nelsonrigg.com



