




**INSTALLATION INSTRUCTIONS:**  
**2022 HONDA NAVI**  
**UPSWEEP FULL EXHAUST SYSTEM BLACK**  
**PART# 48241**

Congratulations, you have purchased the finest exhaust system available for your motorcycle. Your Vance & Hines exhaust is designed and crafted for performance, quality, and style. Please follow the instructions below, check exhaust system for missing or damaged parts and if you need any assistance please contact our technical support line (562) 921-7461.


Fits 2022 Honda Navi models

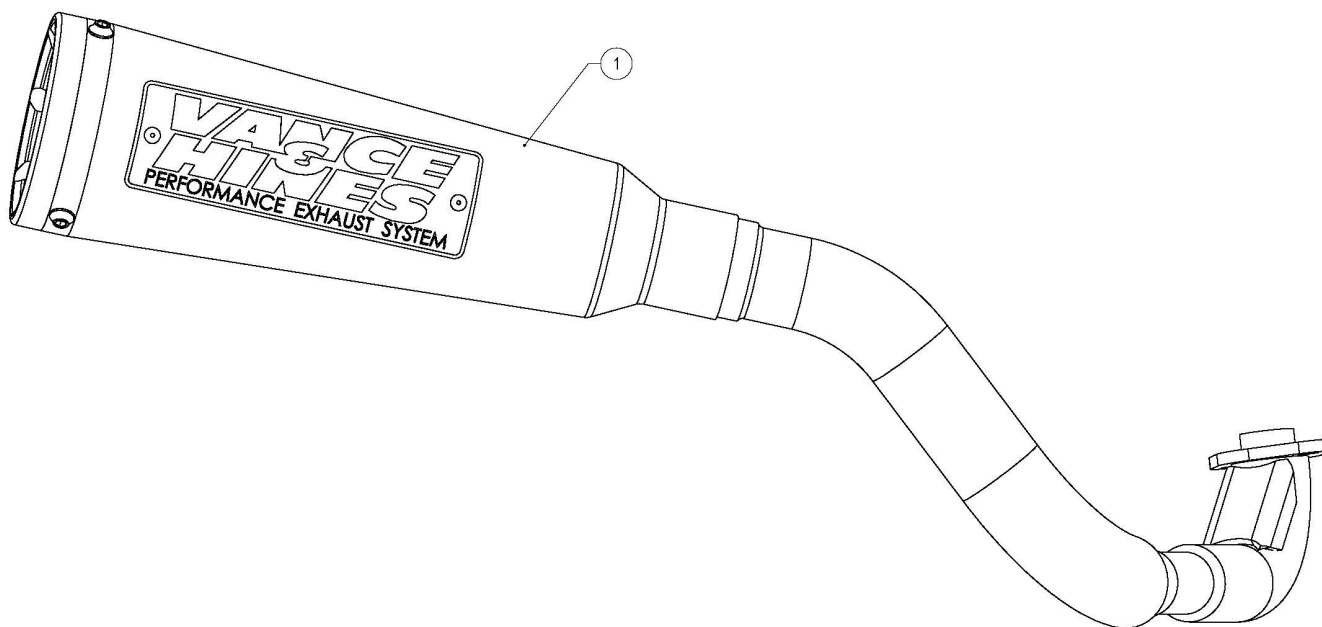


**PARTS LIST**

|   | PART NO. | Description                    | Qty. |
|---|----------|--------------------------------|------|
| 1 | H182FP   | Exhaust System                 | 1    |
| 2 | 1275-P   | Mounting Bracket               | 1    |
| 3 | A949HW   | M10X1.25X25mm                  | 2    |
| 4 | A304HW   | 1/4-20 x 1/2 Button Head Screw | 2    |
| 5 | A979HW   | M7 X 1.0 SS Hex Nut            | 2    |

## HARDWARE

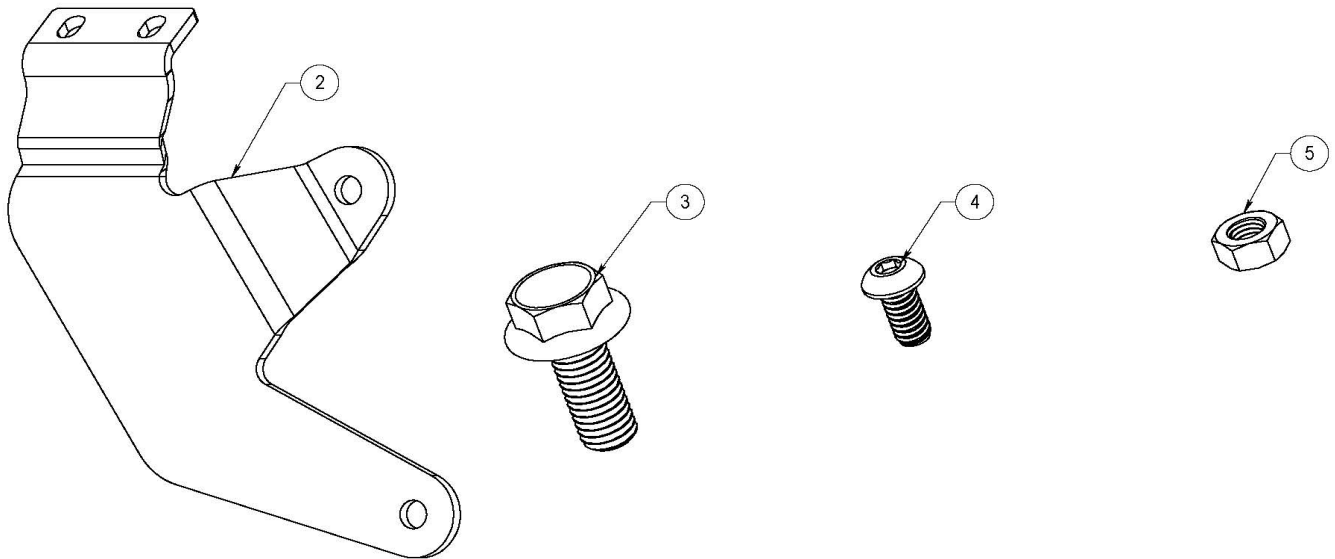

## TOOLS REQUIRED




Sockets: 10mm, 14mm, 15mm

Ratchets: 1/4", 3/8"

Extensions: 1/4"DR x 6"

3/8 "DR 6"



Allen Wrench: 5/32"

## STOCK SYSTEM REMOVAL

1. Remove the two cylinder exhaust port nuts from head pipe, located at the cylinder head.
2. Remove the splashguard bolt, located on the rear fender.
3. Remove the two exhaust chassis mount bolts.
4. Remove the complete exhaust system and set aside.
5. Check the condition of exhaust gasket and replace if worn or damaged.

### **VANCE & HINES SYSTEM INSTALLATION**

1. Install H182FP exhaust using M7 nuts(A979HW). (Do not fully tighten at this time).
2. Fasten exhaust to mounting bracket using the two supplied 1/4-20 screws (A304HW).
3. Install mounting bracket (1275-P) using supplied M10 bolts (A949HW). (Do not fully tighten at this time).
4. Tighten cylinder exhaust port nuts evenly to a torque spec of 10ft-lbs (120 in-lbs).
5. Tighten muffler mounting screws to a torque spec of 4ft-lbs (48 in-lbs).
6. Tighten mounting bracket bolts to a torque spec of 30ft-lbs (360 in-lbs).

### **EXHAUST CARE (BLACK)**

1. When installing a new black exhaust, make sure your hands are clean and free from oil. After installation, thoroughly clean pipes with warm soapy water and a soft cloth. Dry with a clean towel to remove any residue before starting the motorcycle. Do NOT use anything abrasive to clean pipes.
2. Avoid long periods of idling as this can cause discoloration.
3. Intake leaks can cause the engine to run lean and overheat, this could lead to discoloration.
4. Make sure there are no exhaust leaks at the junction of the exhaust pipes and the cylinder head. We recommend replacing gaskets if they are worn.

**Emissions Notice:**

In California, in order to meet Air Resources Board emissions requirements, certain aftermarket part applications have been identified as replacements, and others have received ARB Executive Orders. All other emissions related aftermarket parts are for competition use only. A list of replacement parts and EO parts, and corresponding fitment is provided at [vanceandhines.com/California](http://vanceandhines.com/California).

**Warranty:**

All Vance & Hines products are warranted against defects in material and workmanship for a period of 90 days. This warranty does not cover discoloration or rust. This warranty shall be limited to the repair or replacement of the product, which may be proven defective under normal use. Vance & Hines will not warranty any system that has been abused, misused, improperly installed or modified.

Dealers or distributors are not authorized to make dispositions binding upon Vance & Hines. Vance & Hines will not be responsible for any labor charges incurred in removing or replacing any system under warranty. A return authorization number and a copy of the original purchase invoice must accompany all returns. Parts returned without a return authorization may be refused.

13861 ROSECRANS AVENUE / SANTA FE SPRINGS, CA 90670  
SALES: (562) 921-5388  
TECHNICAL: (562) 926-5291  
FAX: (562) 802-0110

**vanceandhines**  
**.com**