



MOUNTING SUGGESTIONS

Harley Davidson FL/CVO 2023-Up Kodlin Design Squareback Seat

Hardware:	Stock 1/4"-20 Thumb Screw 1/4"-20 Flange Nut x2
Tools needed:	13/16" Open end wrench 7/16" Open end wrench

Removal of Stock Seat:

Two-piece stock seat:

1. Remove the rear 1/4"-20 thumb screw and plastic washer and set them aside. The stock rear fender screw and washer will be used to attach your new

3. Remove the two nuts holding the solo in place with 13/16" wrench.

4. Carefully lift the back of the driver's seat up and back to disengage the front bracket and remove the seat. Remove hand strap from threaded studs.



One-piece stock seat:

1. Remove the rear 1/4"-20 thumb screw and washer and set them aside. The stock rear thumb screw will be used to attach your new Mustang seat.


2. Slide the seat up and back to disengage the front bracket and slip seat out from hand strap.
3. Remove the hand strap from the threaded studs.

Installation of Mustang Seat:

1. Install supplied $\frac{1}{4}$ "-20 flange nuts on threaded studs in fender, tighten with $\frac{7}{16}$ " wrench.



2. Engage the nose bracket into the frame. Push it forward until the hole in the rear bracket is aligned with the threaded fender nut. If needed, a firm downward punch or chop to the nose of the seat will push the seat closer to the tank dash.

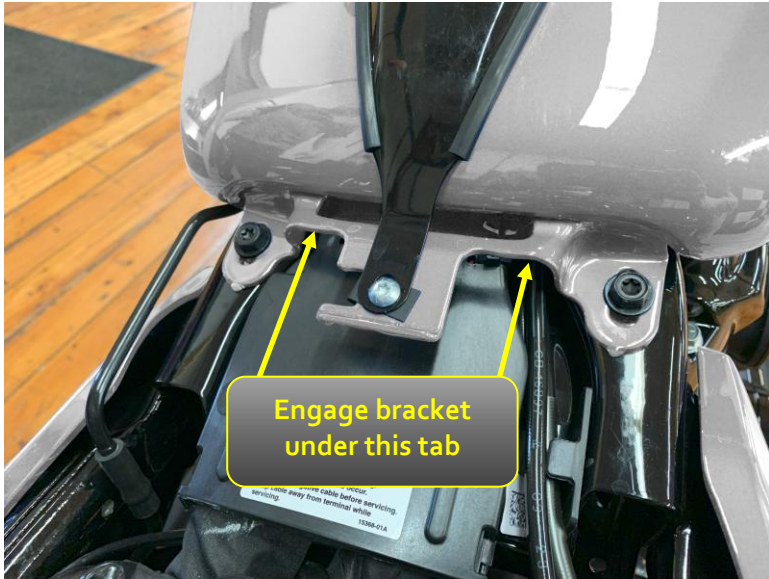

3. Secure rear bracket with the stock plastic washer and ¼"-20 thumb screw.




These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 8:30 - 5:00 Eastern or send an e-mail to tech@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Refers to part number: 76324

MS-FK6FL23CVOSB

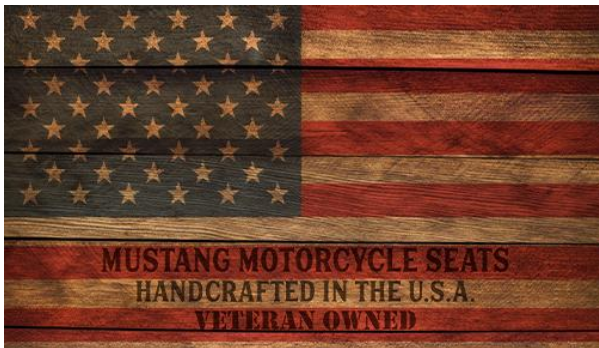

Products made by Mustang Motorcycle Products, LLC are warranted for one year against defects in material and workmanship. Mustang must first be notified of any apparent defect. A return authorization will be issued. Carefully pack the product and return prepaid. Upon receipt, Mustang will make a fair, prompt decision regarding repair or replacement. Incidental and consequential damages arising from or in connection with the installation or use of a Mustang product are not covered by this warranty. An original purchase receipt must be provided to obtain a warranty repair or replacement.